




DDS VFO

RX
7.120000 MHz

PWR

T/R

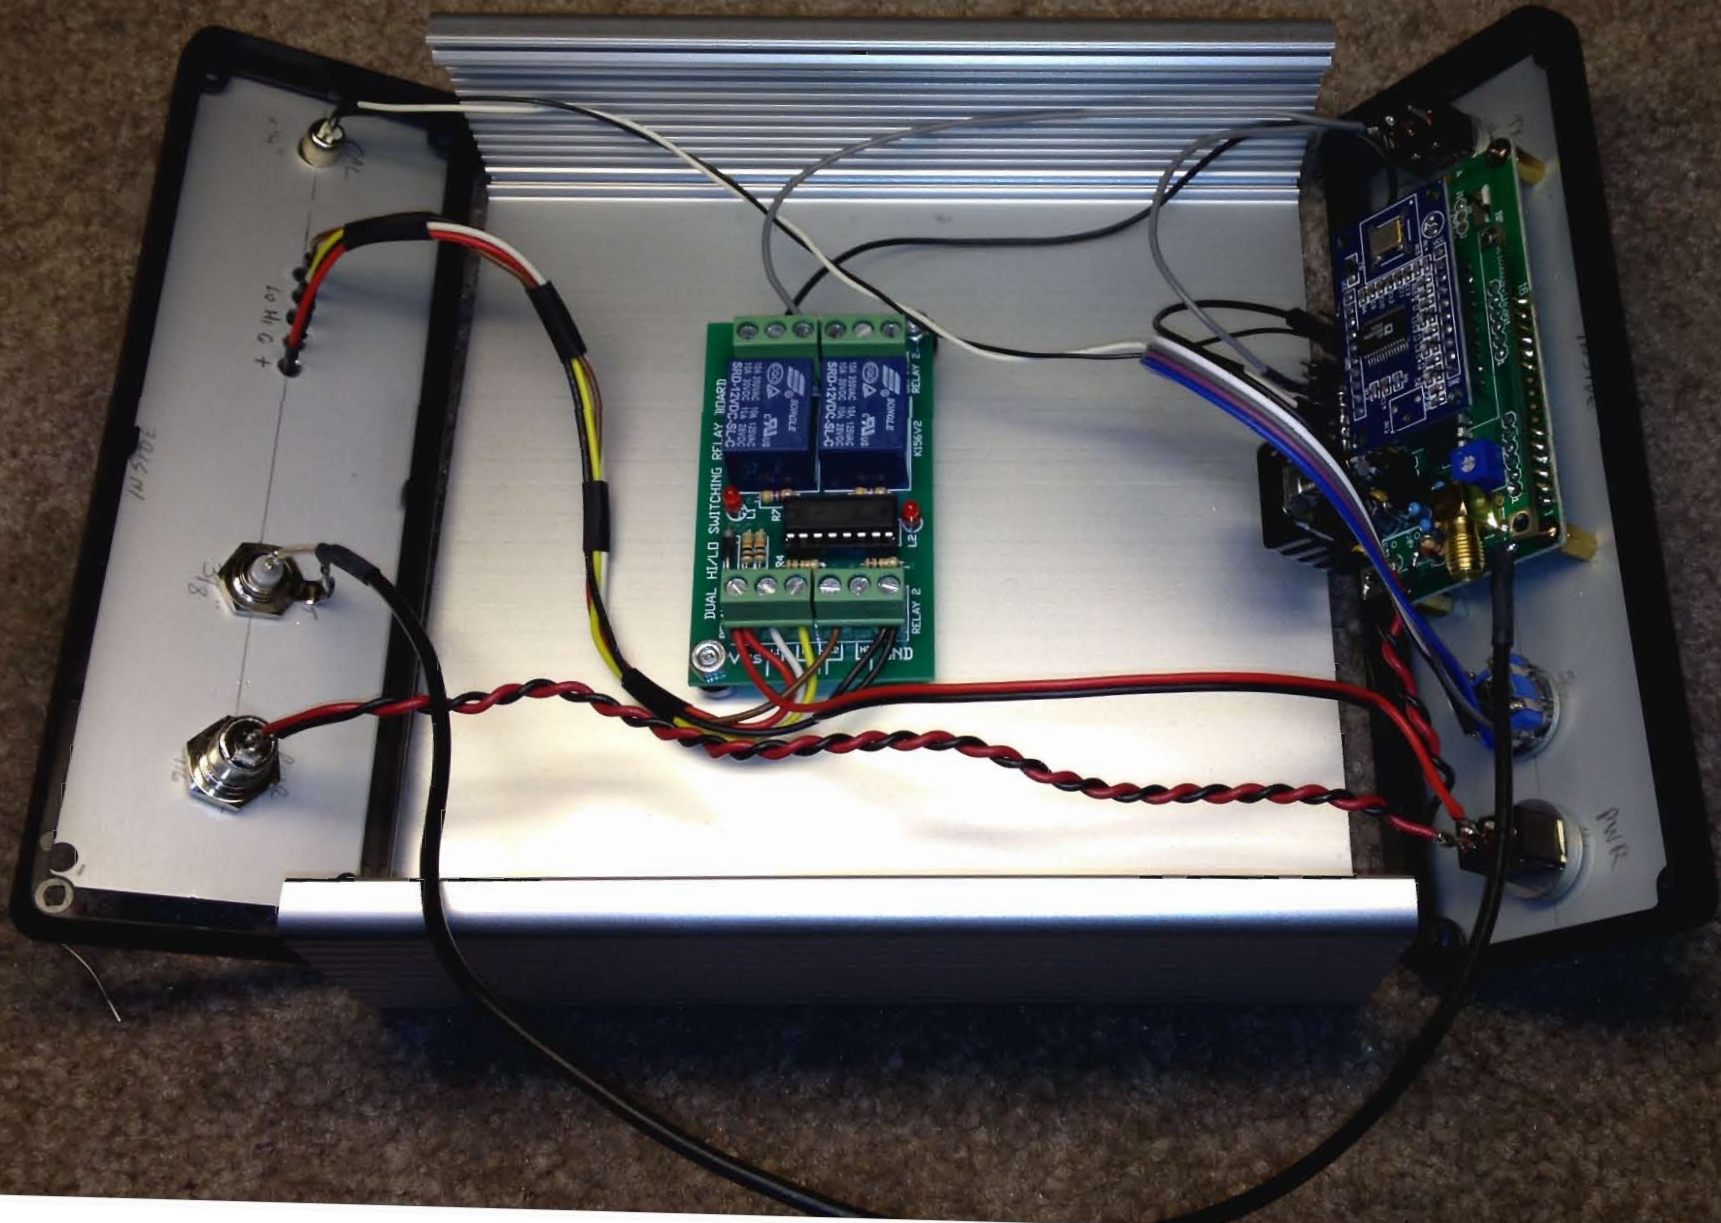


10/24/01

8/16

DUAL-HEAD SWITCHING RELAY HEAD
DATE: 10/24/01
SHEET NO: 1
REV: 1.0
KISBAV2 RELAY 2

POWER

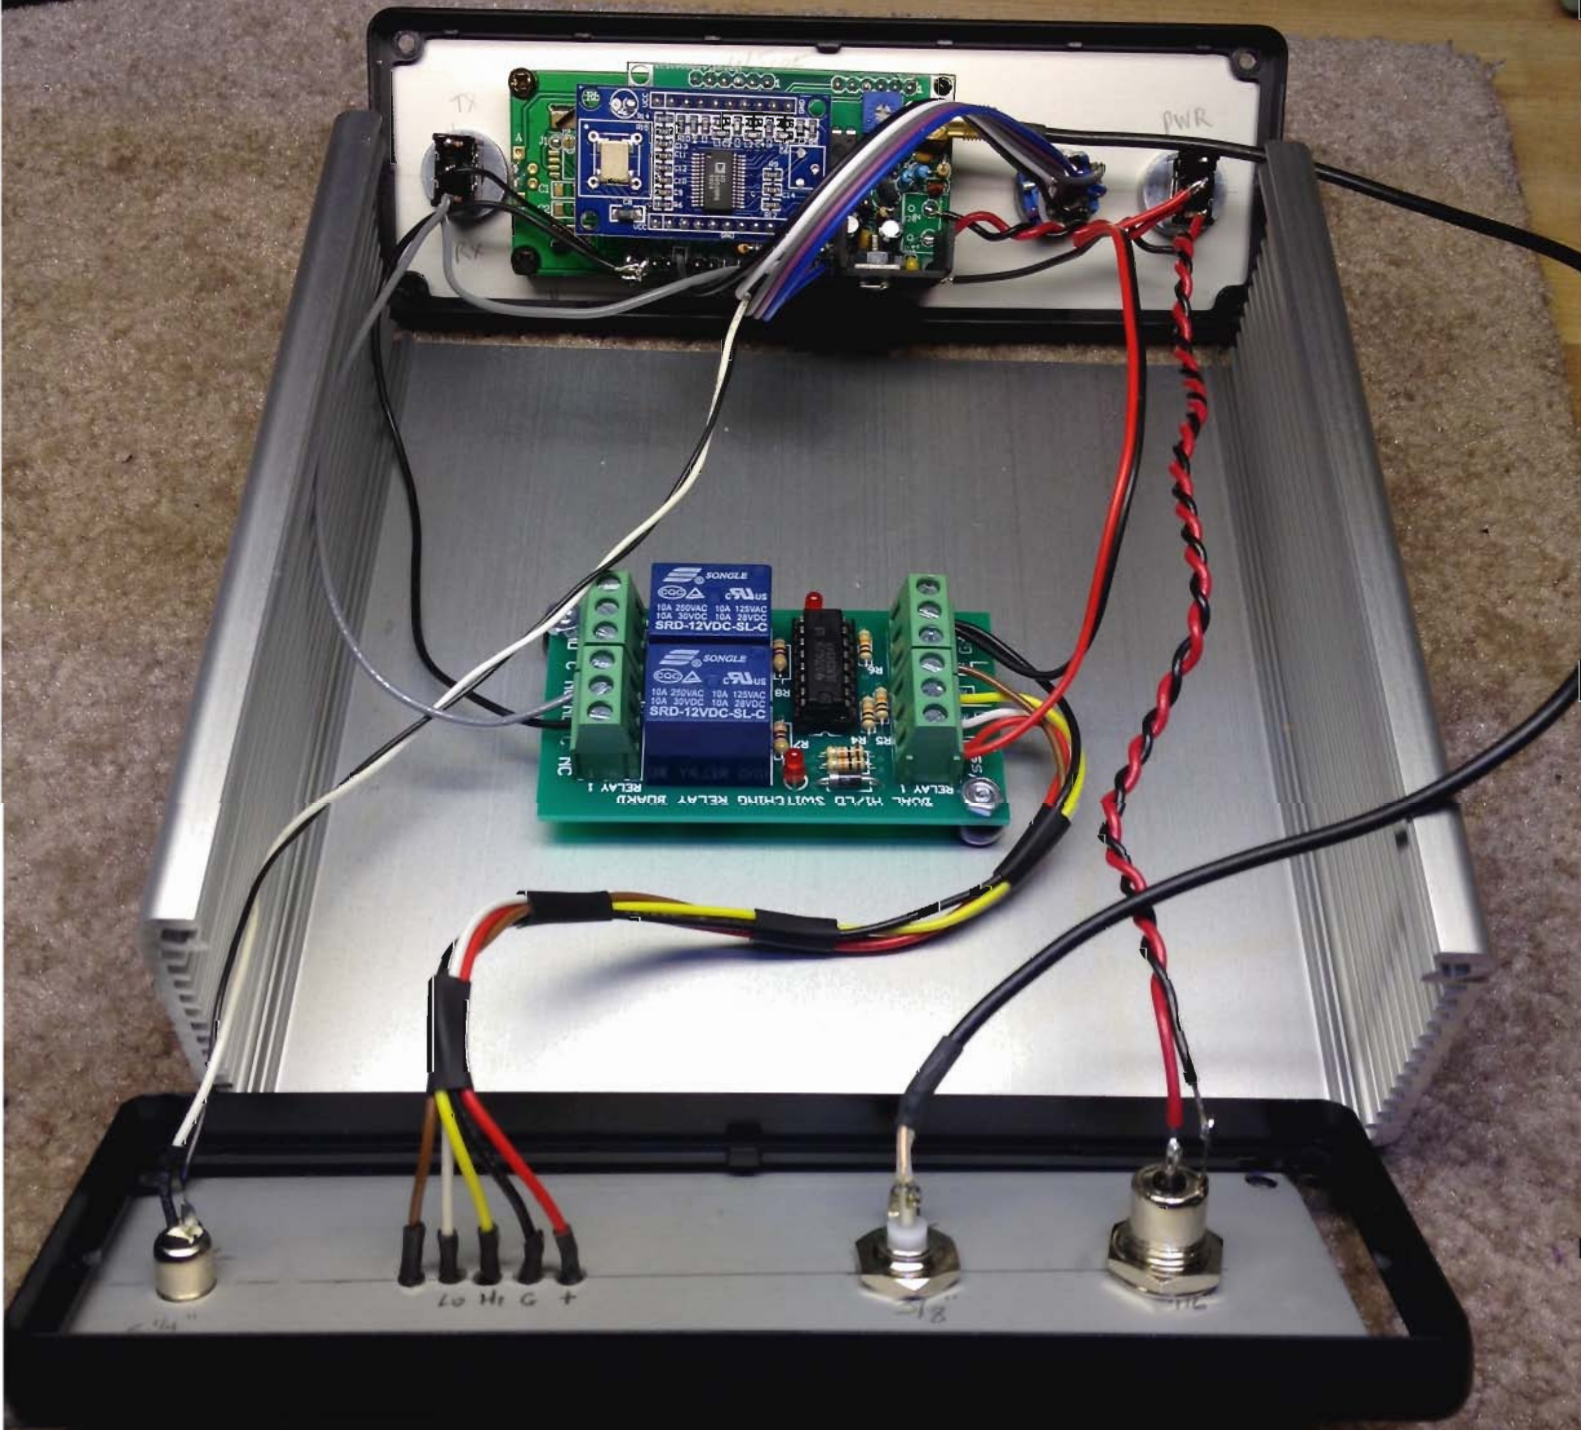

Tx

Pwr

SONGLE
18A 250VAC 10A 125VAC
15A 30VDC 10A 25VDC
SRD-12VDC-SL-C
RELAY 1 M/LD SWITCHING RELAY BUANKU 1

12V
GND
12V



CAL

T/R KEYING

RF OUT

13.8 vdc

10v P-P

ZL1CVD DDS (v11 & v11b PCB)

Added T/R Keying stages -

Either a High (2.4-13v) or a Low (0-0.8vdc) will switch VFO to TX mode.

