




DDS VFO

RX
7.120000 MHz

PWR

T/R

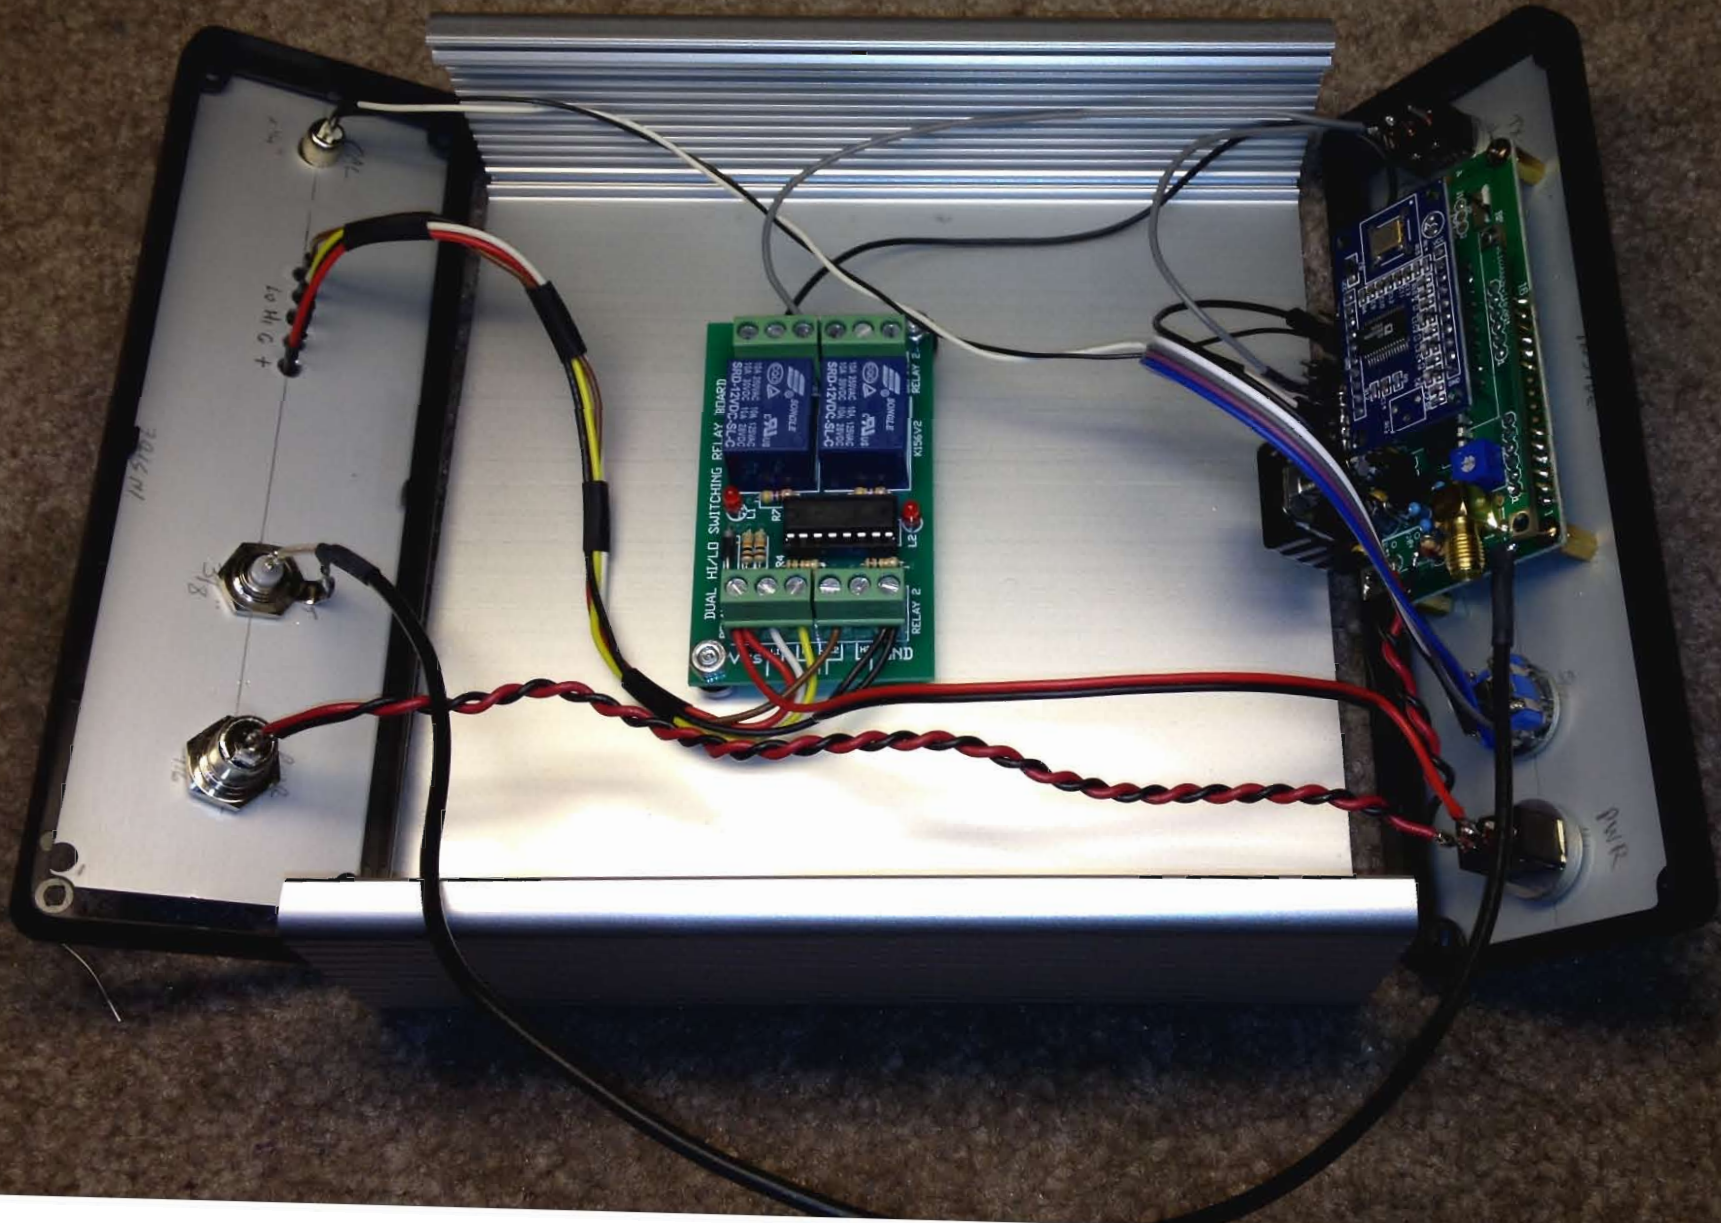


10/24/01

8/16

PWR

DUAL HEAD SWITCHING RELAY HEAD
RELAY 1
RELAY 2

Microcontroller board with various components and a blue chip.

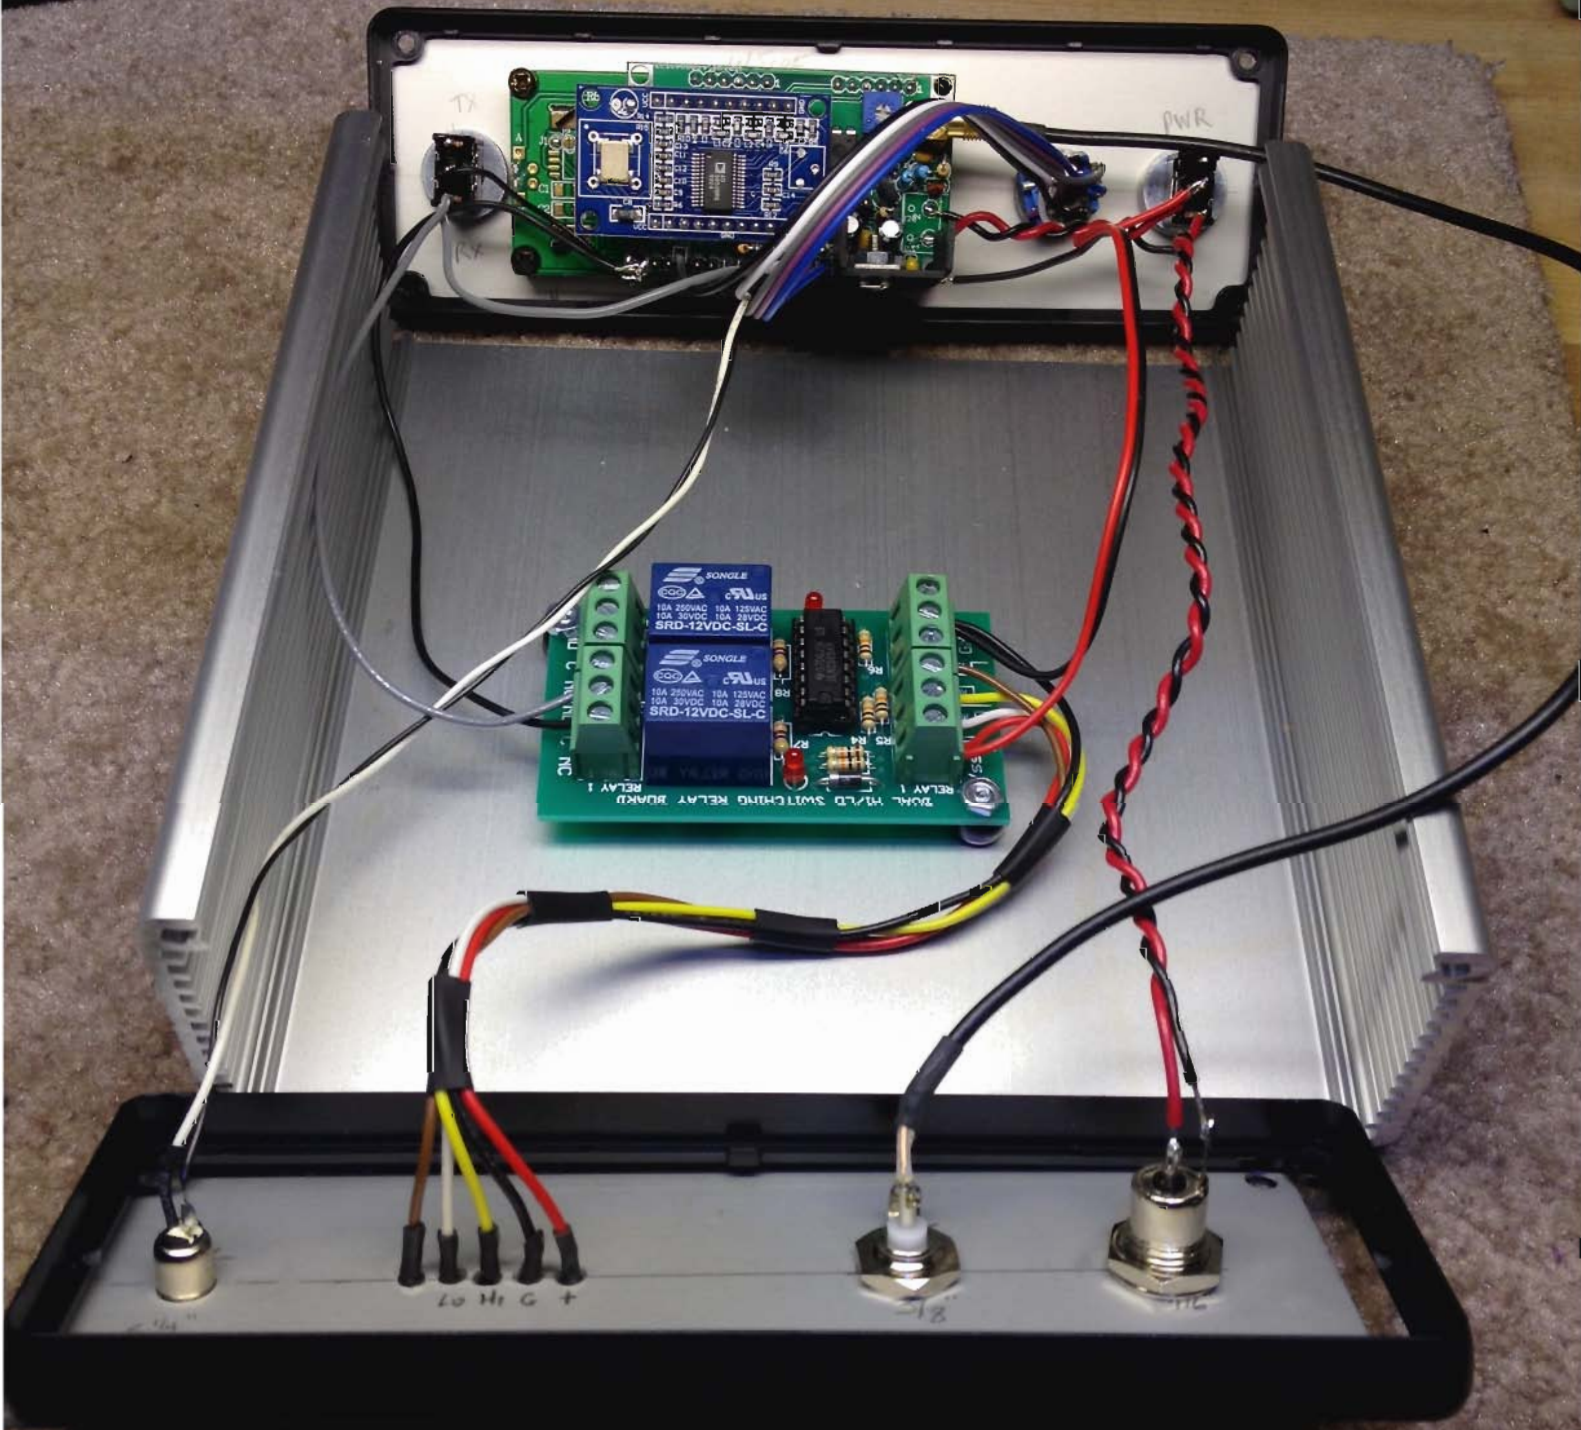



CAL

T/R KEYING

RF OUT

13.8 vdc

10v P-P

ZL1CVD DDS (v11 & v11b PCB)

Added T/R Keying stages -

Either a High (2.4-13v) or a Low (0-0.8vdc) will switch VFO to TX mode.

